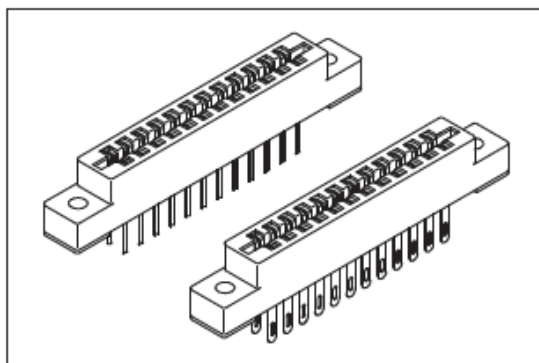


80706: Connector**Gold Plated Edge Connector 3.96mm 0.156" Pitch****Material:**

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 A.


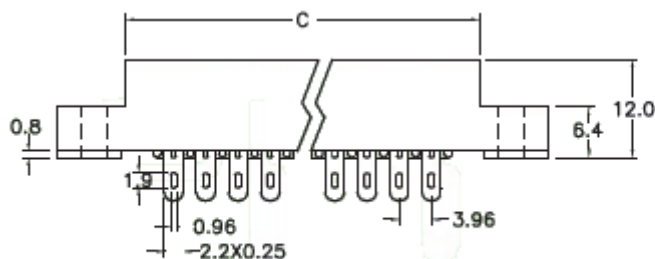
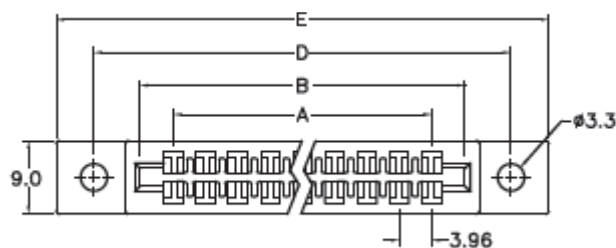

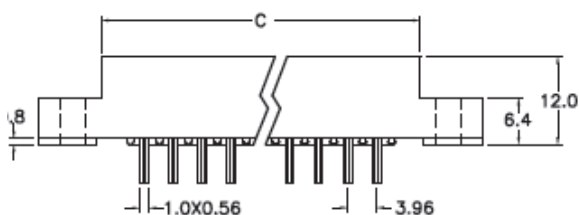
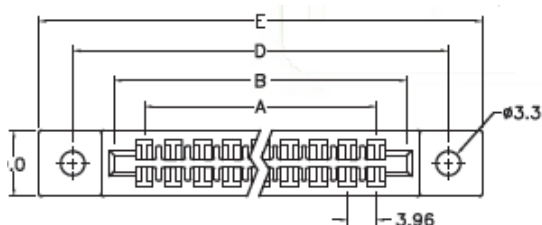
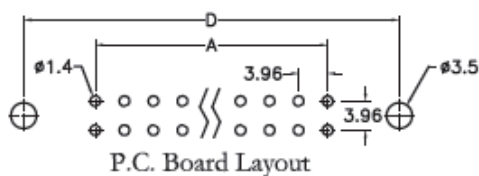
Dielectric Withstanding Voltage: AC 500V.

Insulator Resistance: 1000M Ω min.Contact Resistance: 20m Ω max.

Operating Temperature: -55°C~+105°C.

Features:

- * Accept 1.47mm~1.78mm(0.058"~0.070") thickness PC board.
- * Available in 12pin through 86pin.
- * Overstress protected contact design.

Solder TypeDip Type

Position	Dimension				
	A	B	C	D	E
12	19.80	28.28	31.40	38.80	48.30
20	35.64	44.20	47.00	54.70	64.30
24	43.56	52.00	55.15	62.70	72.20
30	55.44	63.80	66.80	74.50	84.00
36	67.32	75.85	78.90	86.40	96.00
44	83.16	91.60	94.90	102.30	112.00
56	106.92	115.60	118.30	126.20	135.90
60	114.84	123.35	126.72	133.92	143.65
72	138.40	147.40	150.85	158.50	168.80
86	166.32	175.14	178.50	185.75	195.20